


WEMO production lines are suitable for different frame depths, frame widths, wall thicknesses and frame shapes. The lines make door frames with a sheet thickness of up to 1.5 mm. WEMO production lines also guarantee a scratch-free finish of pre-painted material.

www.wemomachines.com

STEEL DOOR FRAMES PRODUCTION LINE CONFIGURATION

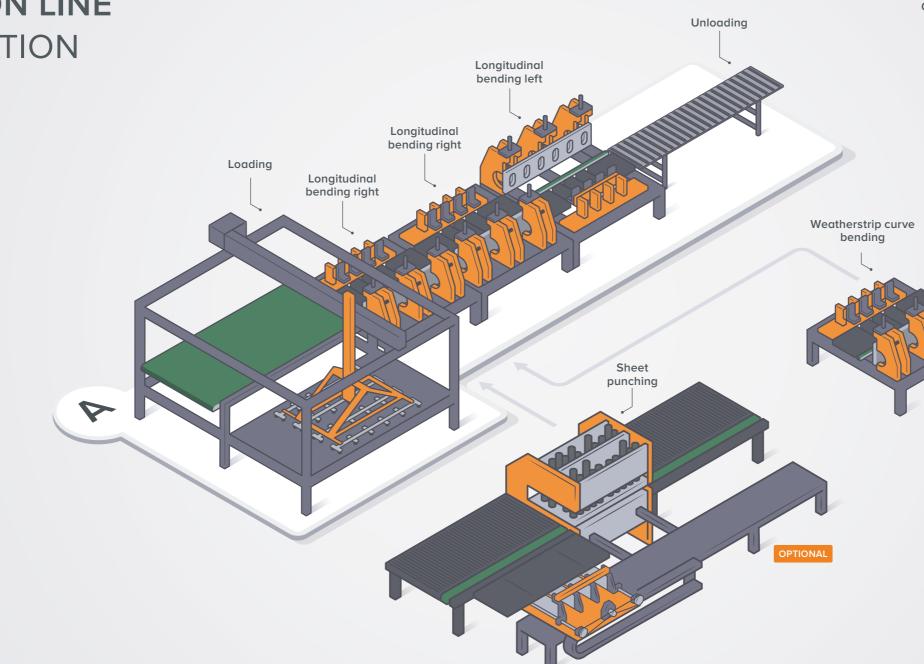

A: Basic configuration

TECHNICAL SPECIFICATIONS


Production speed
Width
Length
Type of material
Material thicknesses


20 sec / prod 139 – 600 mm 600 – 3000 mm Steel (pre-painted, PVC-coating) 1 – 1.5 mm

KEY BENEFITS

- ✓ Highest output
- Flexible for new product types
- ✓ Highest quality and lowest cost per product
- Respond quickly to customer demand

BENDING FORM EXAMPLES









WEMOCARE

WEMO has a lot of knowledge and experience at its disposal. We would like to share that knowledge and experience with you. Then we speak the same language, look together at all innovative possibilities and as partners we will set ever higher standards. Our motivation is crisp and clear: that is how we want to do business together.



PREVENTIVE MAINTENANCE

A long service life with as few

breakdowns as possible.

WARRANTY EXTENSION

In order to optimise this warranty,

we offer you a supplementary

warranty extension.



UPGRADE & CONVERSION Smart upgrade and conversion packages with which you can optimise your machine.



TRAINING & EDUCATION

Effective training for new employees will significantly increase the output and life of your machine.

INSPECTION A carefully conducted machine inspection gives an exact picture of the condition of your machine.



SPARE PARTS

Fast and expert delivery of our high quality machine parts.

Trusted by the best brands in the world







WEMO Nederland B.V. Larenweg 38 5234 KA 's-Hertogenbosch

Postbus 3391 5203 DJ 's-Hertogenbosch The Netherlands Tel: +31 73 6407640 Fax: +31 73 6430116 E-mail: info@wemo.nl

www.wemomachines.com